





产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，客户到满意，超过期





产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，客户到满意，超过期





LCD

0 1000V,                      250V 10kV,                      0.01M 1000G  
 0 750V

6

	250V(± 10%)	0 10M	± 3% dg± 5dgt	0.01M
		10 100M		0.1M
		100 1000M		1M
	500V(± 10%)	1G 10G	± 5% dg± 5dgt	0.01G
		0 10M	± 3% dg± 5dgt	0.01M
		10 100M		0.1M
		100 1000M		1M
	1000V(± 10%)	1G 10G	± 5% dg± 5dgt	0.01G
		0 20M	± 3% dg± 5dgt	0.01M
		20 200M		0.1M
		200 2000M		1M
	2500V(± 10%)	2G 20G	± 5% dg± 5dgt	0.01G
0 2000M		± 3% dg± 5dgt	1M	
		2000M 20G	± 5% dg± 5dgt	0.01G

225

027-83267669



	5000V(± 10%)	20G 200G	± 20% dg± 10dgt	0.1G
		0 2000M	± 3% dg± 5dgt	1M
		2000M 20G	± 5% dg± 5dgt	0.01G
		20G 200G	± 20% dg± 10dgt	0.1G
	10kV(± 10%)	200G 1000G	± 20% dg± 10dgt	1G
		0 2000M	± 3% dg± 5dgt	1M
		2000M 20G	± 5% dg± 5dgt	0.01G
		20G 200G	± 20% dg± 10dgt	0.1G
		200G 1000G	± 20% dg± 10dgt	1G

1 T Tera ohm =1000G =10<sup>12</sup>

1 G Gi ga ohm =1000M =10<sup>9</sup>

1 M Mega ohm =1000K =10<sup>6</sup>

	DC 0.0V 1000V	± 1.5% dg± 3dgt	0.1V
	AC 0.0V 750V	± 1.5% dg± 3dgt	0.1V


	23 ± 5 75% h	
(V)	250 500 1000 2500 5000V 10KV	
(V)	× 1± 10%	
G	0.01M 1000G	: 0.01M
	0 1000V	: 0.1V
	0 750V	: 0.1V
	5mA(10KV)	




1. LCD
2. LINE
3. V
4. GUARD
5. EARTH
- 6.
7. USB
- 8.
- 9.
- 10.
- 11.
- 12.
- 13.
- 14.
- 15.

1  
LINE  
GUARD  
I  
R=V/I

V  
R



$$R = V / I$$

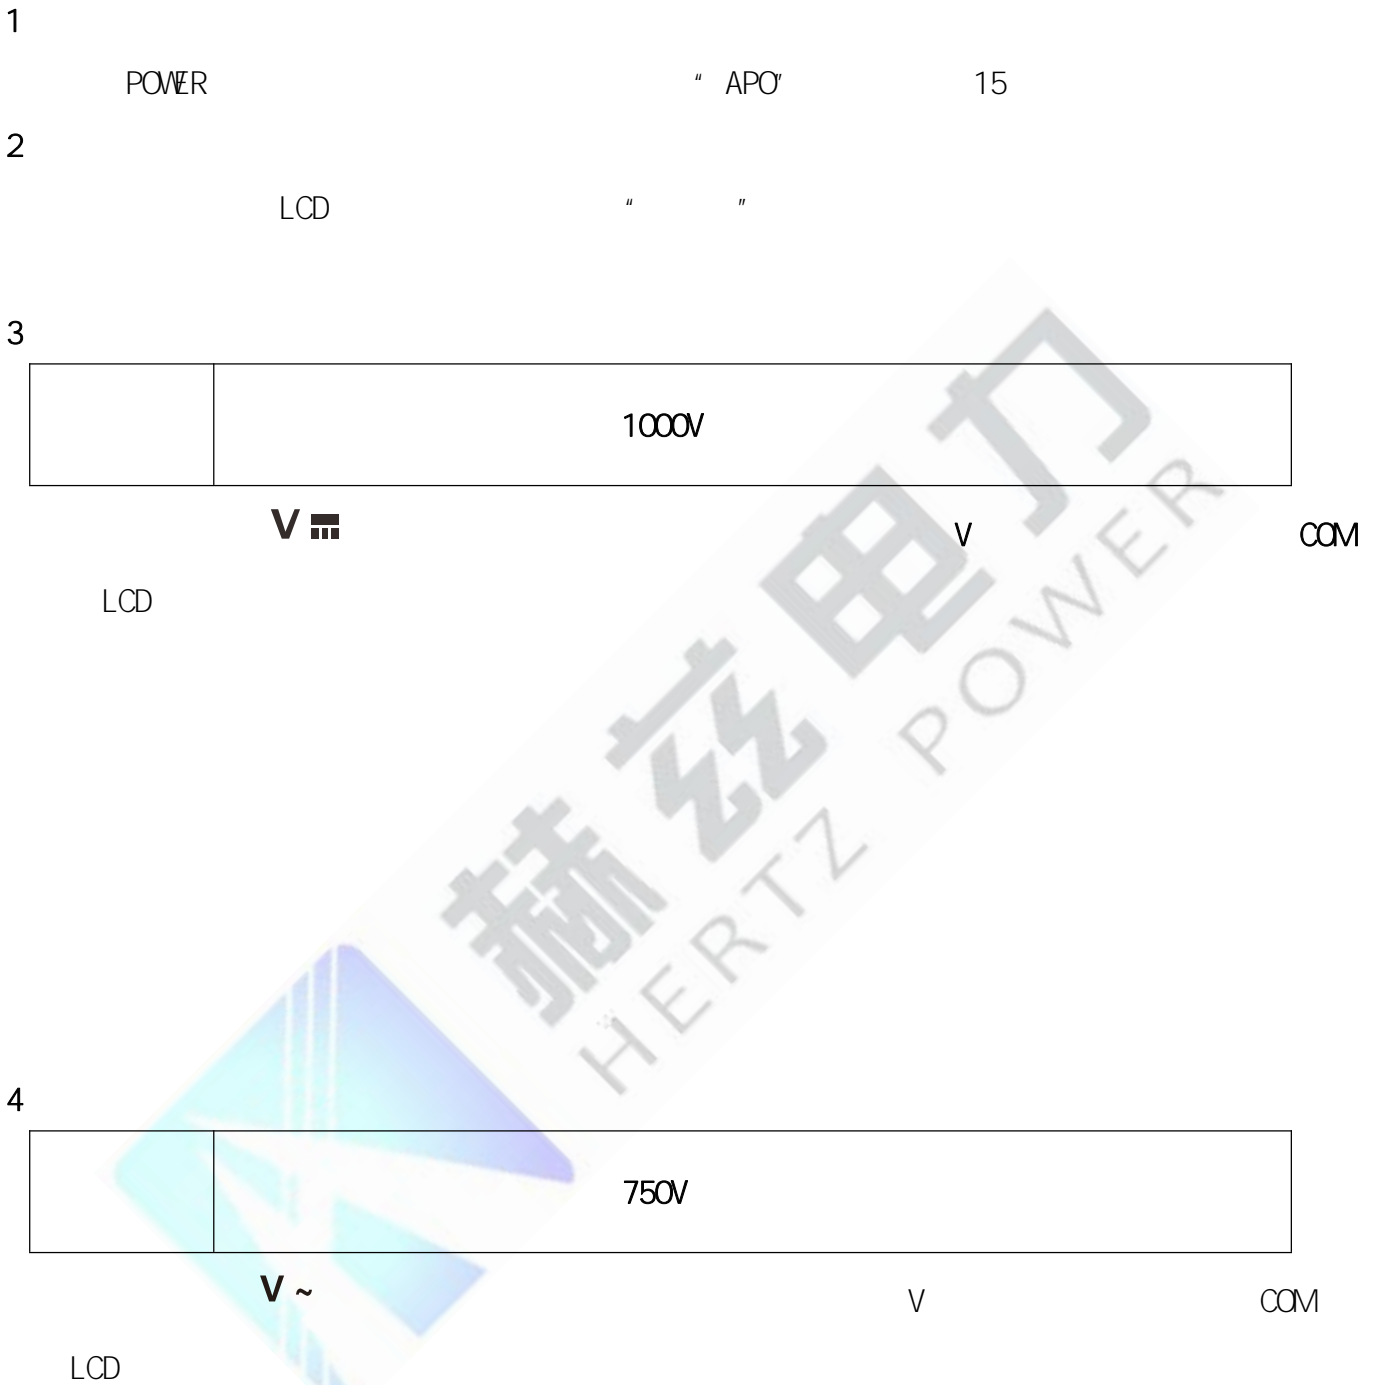



6 GUARD

7 PI (DAR)  
7.1







" "

" 60.15S"

15S

7.4

PI

DAR

( )

( ) ( 1)





" "

" - - - - -"

600V

9999M

10 /

" MEM

" FULL"

1258M

" MEM

3

11 /

" MR

" MR

" ▲ "

" ▼ "

1

" "

" "

10

" MR

3

6


LCD

" NULL"

" CLEAR"

NO

YES

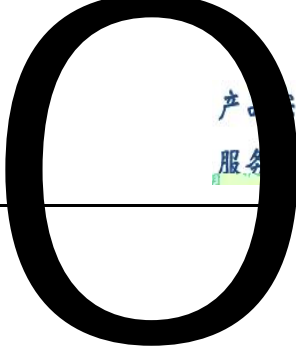

12V

10V

1

1

2

1



"

"

"

"

1

2

1.

2

1

2

3

027-83267669

4

2

24

24

48